





Average illuminance figure

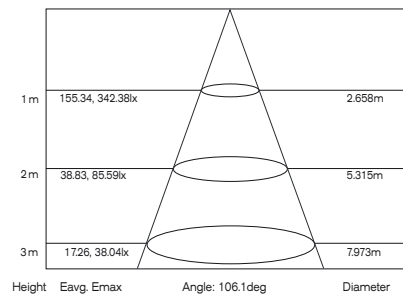

C Plane distribution diagram

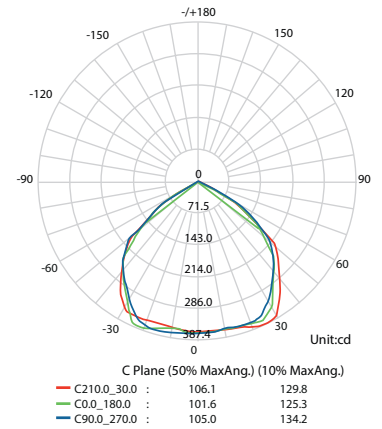

Features

- Only consumes 10W of power
- Aluminium die cast housing
- Tempered glass face
- Long operating life and performance

Applications

Suitable for both outdoor and indoor commercial applications such as parking areas, billboards and common areas.



Part no.	FLA-SC010W-V
Power (W)	10
Lumen (Lm)	900
V.E. lumens	1,800
Light source	High Intensity LEDs
Housing	Die cast aluminium & tempered glass
Colour temp	Cool white, 5000k
Power requirement	AC 100~240V
CRI (%)	80
Beam angle (°)	120
Weight (Kg)	600g
Dimensions (mm)	Height: 130 Width: 120 Depth: 40
Operating temp	-20° to 40°C
IP rating	66
Lifetime	Up to 30,000 hours
Warranty	5 years



All electrical work must be performed by a qualified electrician.

P: 1300 326 456

F: 03 9587 5971

E: sales@ecoglow.com.au

W: www.ecoglow.com.au

